
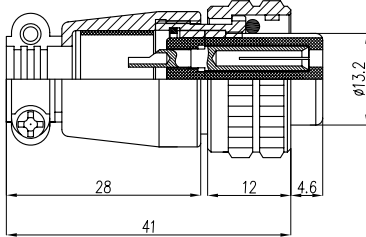

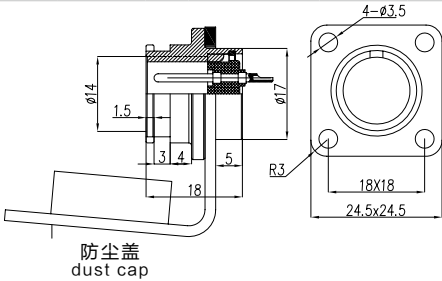
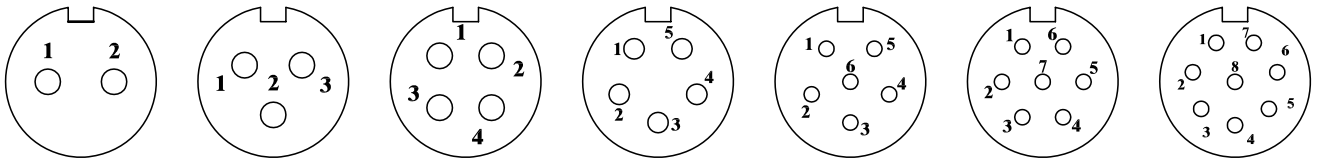


图例 Description-Figure	安装尺寸图 Drawing	芯数 Contacts	订货号 Ordering-NO
直式电缆母插头 Straight female plug IP65 		2	XH17-2A
		3	XH17-3A
		4	XH17-4A
		5	XH17-5A
		6	XH17-6A
		7	XH17-7A
		8	XH17-8A
		方形公插座 Square male socket IP65 	
3	XH17-3H		
4	XH17-4H		
5	XH17-5H		
6	XH17-6H		
7	XH17-7H		
8	XH17-8H		

孔位排列 (从针的方向看)

The hole place arranges(Comply with the needle direction)



材料和技术方式

Material and specifications

接插方式 Coupling	卡槽连接 Card slot	接线方式 Termination	焊接 Solder
外壳材料 Shell material	锌基合金 (镀镍) Zinc alloy with nikelplate	接插次数 Mating cycle	500 次 500
绝缘体 Insert material	电木 bakelite	温度范围 Temperature range	-20℃ ~ +85℃
接触体材料 Contact material	铜 (镀银 / 金) copper(silverplated/gold)	电缆直径 Cable diameter	≤ φ9.0mm

技术参数

Technology parameter

芯数 NO.of contacts	2	3	4	5	6	7	8
额定电流 / 电压 Rated current/voltage	25A-360V	25A-300V	20A-300V	15A-200V	5A-200V	5A-200V	5A-200V
工作电压 (AC.V) 分钟 Operation limit voltage(AC.V.rms)	500	400	400	260	260	260	260
耐电压 (AC.V) 分钟 Withstanding voltage(AC.V.rms) 1 minute	2000	1500	1500	1500	1500	1500	1500
绝缘阻抗 (MΩ) DC500V Insulation resistance(MΩ MIN.) at DC 500V	2000	1500	1500	1500	1500	1500	1500
接触阻抗 (MΩ) DC1A Contact resistance (MΩ MAX.) AT DC 1A	5	5	5	8	12	12	12
焊杯口径 (mm) Solder cup mouth aperture	1.7	1.7	1.7	1.2	0.9	0.9	0.9
接触体孔径 (mm) Solder inter diameter	2.5	2.5	2.5	2.0	1	1	1